


11. Performance table

Model	Power P2 (KW)	Flow	L/min m ³ /h	0	100	200	300	400	500	550	600	700	800
				0	6	12	18	24	30	33	36	42	48
EWO-150	1.1	H (m)	12	11.5	10	7.5	5						
EWO-200	1.5		15	14	13	10.5	9	6					
EWO-300	2.2		17	16.5	16	15	13.5	11	10.5	10		9	
EWO-400	3.0		21	20	19	17.5	16.5	15	14	13	12	11	

Model	Power P2		Power P1 (KW)		Capacitance Single Phase µF, 50V	Full load current (A)			Locked-rotor current (A)		
	KW	HP	Single Phase	Three Phase		Single Phase 230V	Three Phase 230V	Three Phase 400V	Single Phase 230V	Three Phase 230V	Three Phase 400V
EWO-150	1.1	1.5	1.42	1.40	30	7.0	4.5	2.6	40.8	27	15.6
EWO-200	1.5	2.0	1.78	1.75	40	9.2	6.0	3.5	57.6	36	21
EWO-300	2.2	3.0	2.65	2.60	50	11	8.4	4.9	84	54	24.2
EWO-400	3.0	4.0	-	3.52	-	-	11	6.3	-	67.8	39

Model	Power P2		Frame	Noise level(50Hz) Lpa-dB(A) ± 3	Noise level(60Hz) Lpa-dB(A) ± 3
	KW	HP			
EWO-150	1.1	1.5	80	65	70
EWO-200	1.5	2.0	80	67	72
EWO-300	2.2	3.0	90	68	73
EWO-400	3.0	4.0	90	70	75

12. Installation sketch

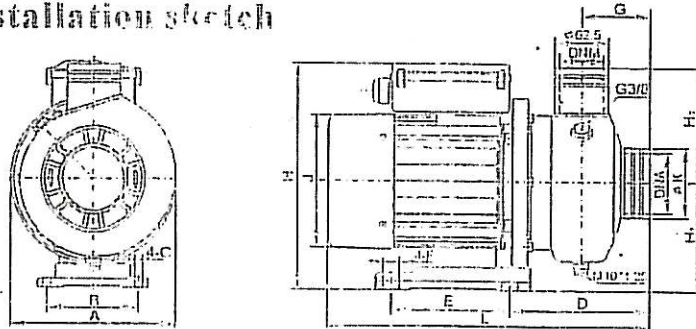

Model	A	B	C	D	E	F	G	J	L	H		H ₁	H ₂	K	DIA	DNM
										Single Phase	Three Phase					
EWO-150	193	108	9	163	138	19	82	155	378	265	235	125	133	62.5	G2	G2
EWO-200	193	106	9	165	138	19	82	155	378	265	235	125	133	62.5	G2	G2
EWO-300	193	108	9	165	138	19	82	169	415	242	242	125	133	80	G2 1/2	G2
EWO-400	193	108	9	165	138	19	82	169	432	242	242	125	133	80	G2 1/2	G2

13. Performance curve

